



STANDARD

PELLETIZED LIMESTONE

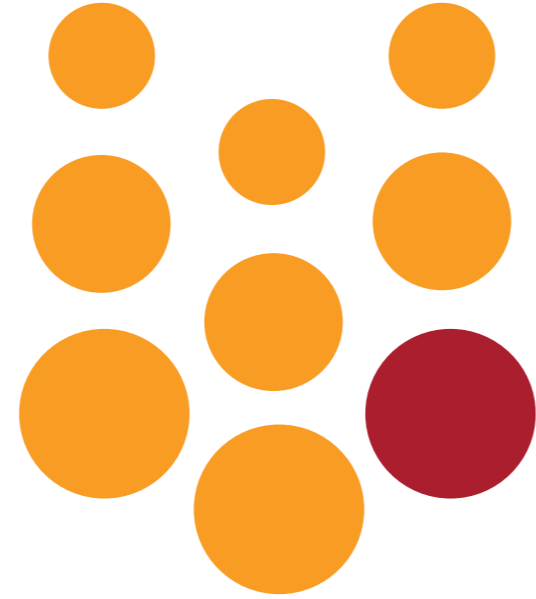

STANDARD
98G™
PELLETIZED LIMESTONE

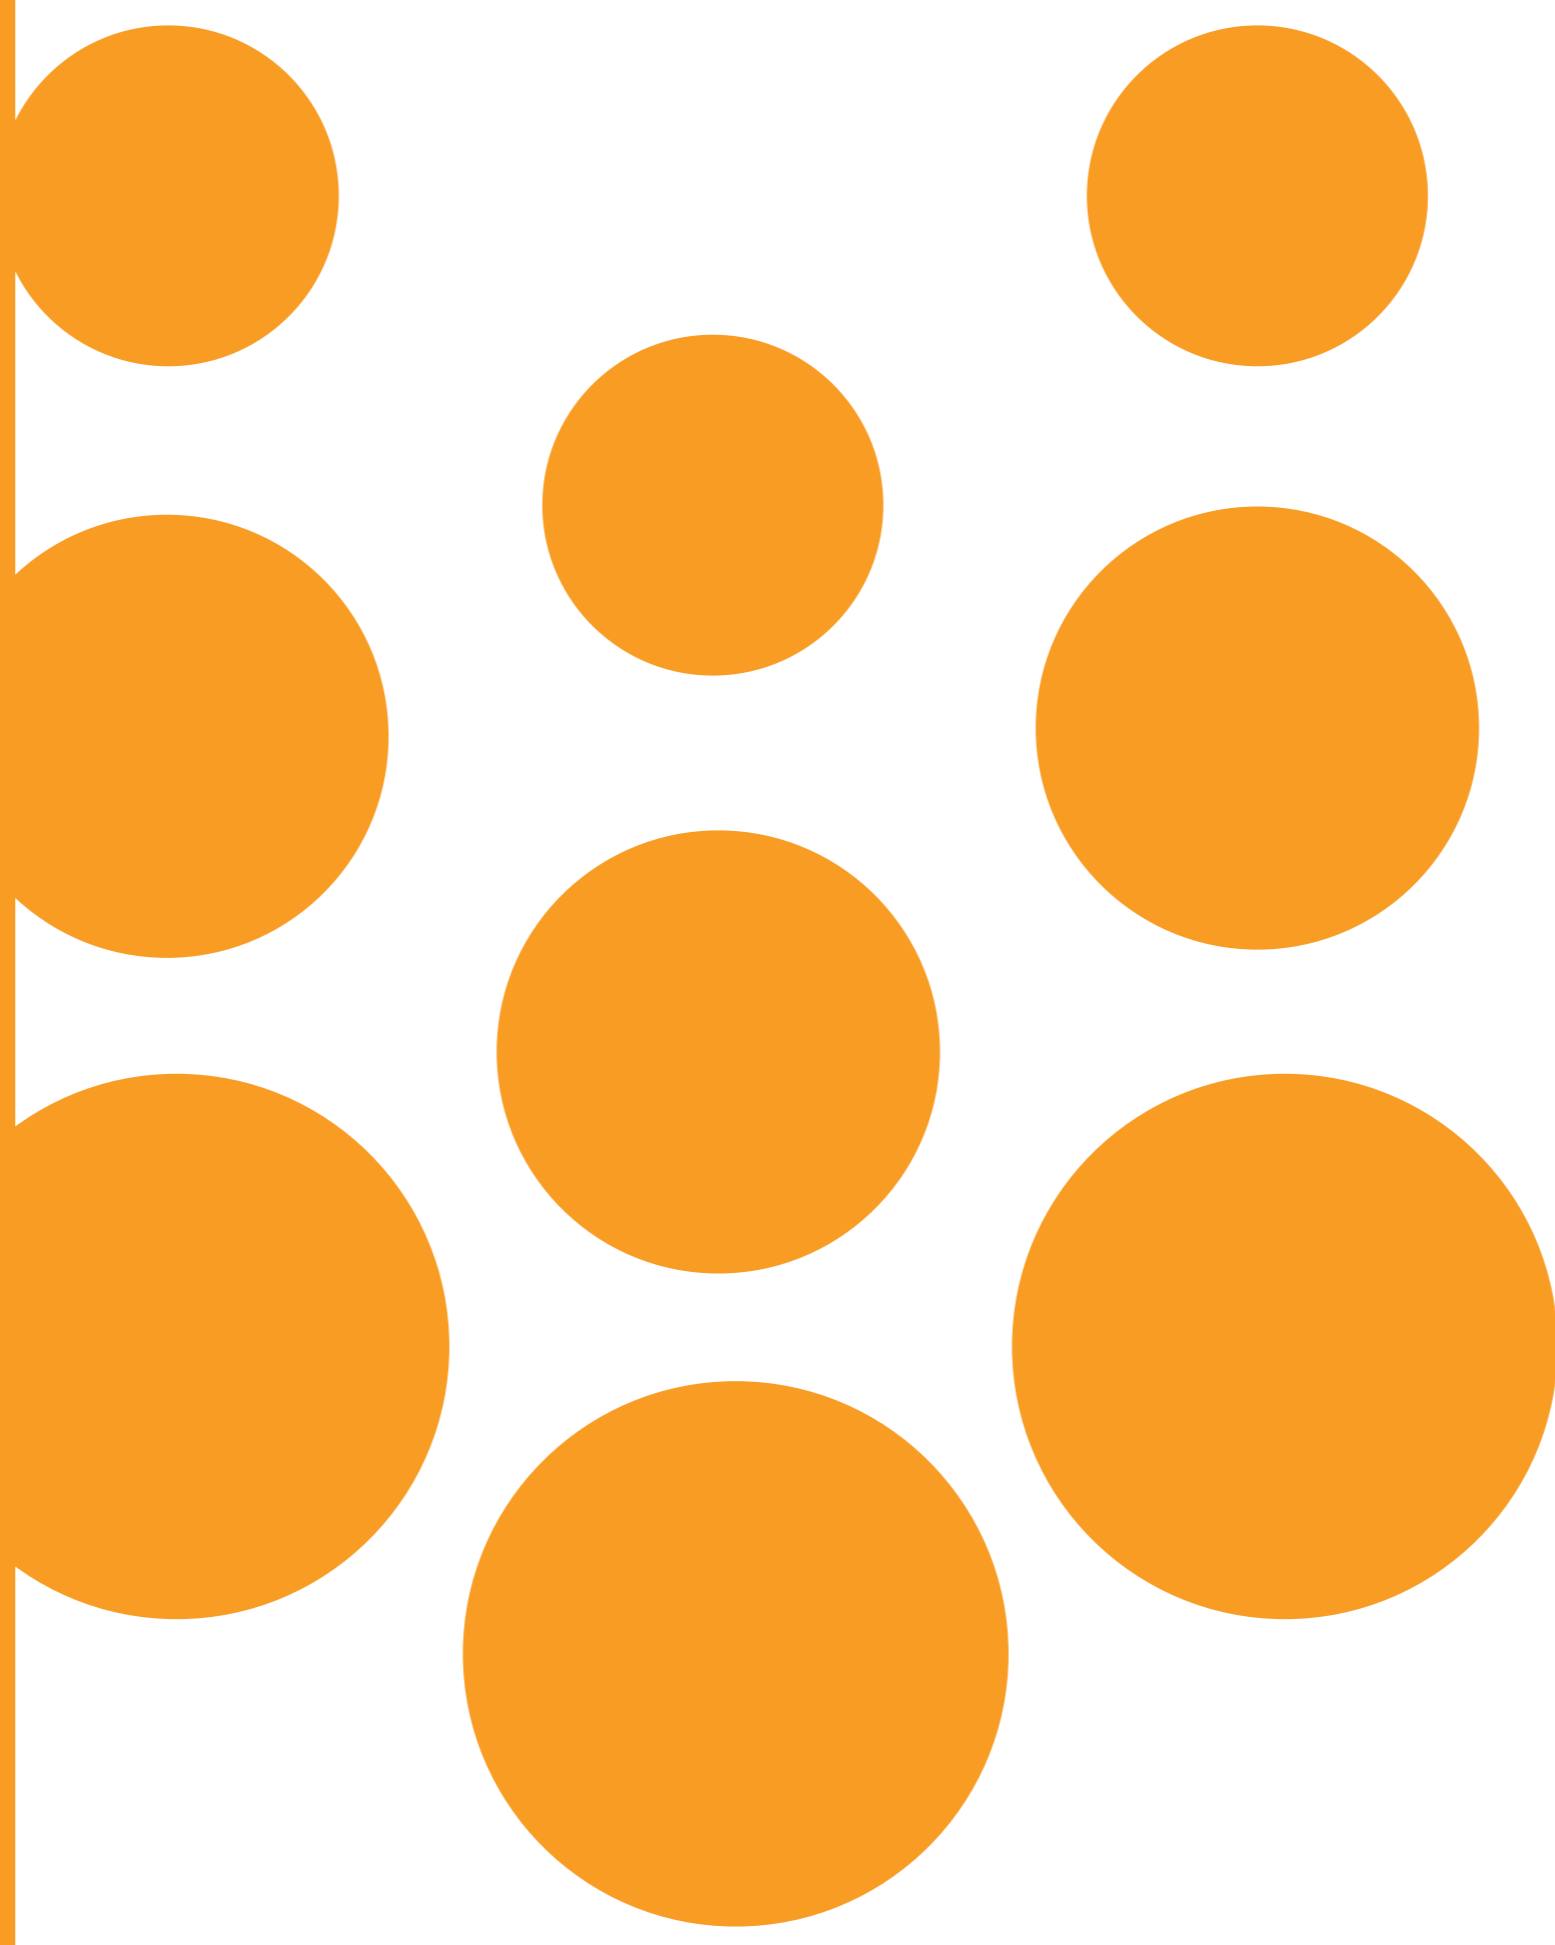

Manufactured and Guaranteed by:
Calcium Products
Gilmore City Location
50602 330th Ave.
Gilmore City, IA 50541

Corporate Address:
Calcium Products
ISU Research Park
2520 N. Loop Dr., #7100
Ames, IA 50010



NET WT. 50 lbs./22.67 kg



STANDARD
98G™
PELLETIZED LIMESTONE



STANDARD

STANDARD

PELLETIZED LIMESTONE



STANDARD
98G™
 PELLETIZED LIMESTONE

RECOMMENDATIONS

It is recommended that a complete soil test be taken to determine the pH and nutrient levels before applying any material to the soil. Soil test data allow you to determine the most effective and efficient application rate.

Application Rates

As suggested by your soil test. Apply only as directed.

| Soil pH | Range | Rate |
|---------|-------------------|-------------------------------|
| 6.5-7.0 | Optimum Range | Up to 12 lbs/1000 sq. ft. |
| 6.0-6.5 | Slightly Acidic | 12-25 lbs/1000 sq. ft. |
| 5.5-6.0 | Moderately Acidic | 20-50 lbs/1000 sq. ft. |
| 5.0-5.5 | Severely Acidic | See dealer for recommendation |
| < 5.0 | Critically Acid | See dealer for recommendation |

Typical Spreader Settings

| Drop Spreaders | 10 lbs/1000 sq. ft. | Broadcast Spreaders | |
|-----------------------------------|---------------------|----------------------------|------|
| Scotts AccuGreen 1000, 2000, 3000 | 9 | Scotts Speedy Green Rotary | 11.5 |
| Earthway | 13 | Earthway | 22 |
| Precision Brand | 9 | Precision Brand | 13 |
| Vigoro | 11.5 | Vigoro | 9 |

Actual settings may vary and depend on spreader type, mode and condition of the spreader. Always check spreader rate and setting prior to application of 98G Standard Pelletized Limestone. Bulk Density - 72 lbs/CF

Guaranteed Analysis

Calcium (Ca): 36%
 Calcium Carbonate (CaCO₃): 94%
 Calcium Carbonate Equivalent (CCE): 94%
 Moisture content does not exceed: 1.0%

Derived from limestone.

Sieve Sizing Before Pelletizing

100% passing 4-mesh
 100% passing 8-mesh
 100% passing 10-mesh
 100% passing 20-mesh
 98% passing 40-mesh
 97% passing 50-mesh
 95% passing 60-mesh
 90% passing 100-mesh
 70% passing 200-mesh

PENNSYLVANIA:

ENV = 90%

OHIO:

1823 Pounds of ENP/Ton

IOWA:

Iowa Secretary of Agriculture Certified 1820 lbs ECCE per ton.

FLORIDA:

F001993: this material requires 1894 lbs to be equal to one ton of standard liming material.

NEBRASKA, OKLAHOMA:

ECCE = 91%

KANSAS:

ECC = 91.6%

ECCE = 1832 lbs/ton

MINNESOTA:

ENP = 90%

MISSOURI:

ENM = 740 lbs/ton; Emg = 2 lbs/ton

NORTH CAROLINA:

1880 lbs. of this material equals one ton of standard liming material. One standard ton of lime is 90% Calcium Carbonate Equivalent
 ENV = 99%

TENNESEE:

RNV = 93%

MASSACHUSETTS:

ENV = 90%

NEW YORK:

TNV = 94%


WISCONSIN:

Neutralizing Index: 92

Neutralizing Index Zone = 90-99

OREGON:

Lime Score = 92

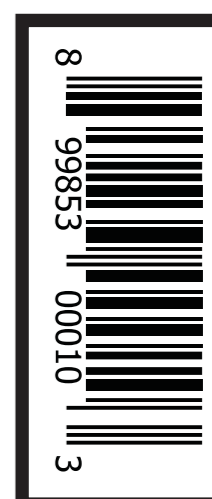

Information regarding the contents and levels of metals in this product is available on the internet at <http://www.aapfco.org/metals.html>

98G Standard Pelletized Limestone is intended to raise the pH of acidic soils.



CALCIUM PRODUCTS™

ISU Research Park, 2520 North Loop Drive, Suite #7100, Ames, IA 50010
 800-255-8196 • info@calciumproducts.com • www.calciumproducts.com
 Calcium Products, the Calcium Products logo, 98G and the 98G logo are trademarks of Calcium Products. © 2017 Calcium Products. All rights reserved.