

MINI

PELLETIZED LIMESTONE



RECOMMENDATIONS

It is recommended that a complete soil test be taken to determine the pH and nutrient levels before applying any material to the soil. Soil test data allow you to determine the most effective and efficient application rate.

Application Rates

As suggested by your soil test. Apply only as directed.

Soil pH	Range	Rate
6.5-7.0	Optimum Range	Up to 12 lbs/1000 sq. ft.
6.0-6.5	Slightly Acidic	12-25 lbs/1000 sq. ft.
5.5-6.0	Moderately Acidic	20-50 lbs/1000 sq. ft.
5.0-5.5	Severely Acidic	See dealer for recommendation
< 5.0	Critically Acid	See dealer for recommendation

Typical Spreader Settings

Drop Spreaders	10 lbs/1000 sq. ft.	Broadcast Spreaders	
Scotts AccuGreen 1000, 2000, 3000	9	Scotts Speedy Green Rotary	11.5
Earthway	13	Earthway	22
Precision Brand	9	Precision Brand	13
Vigoro	11.5	Vigoro	9

Actual settings may vary and depend on spreader type, mode and condition of the spreader. Always check spreader rate and setting prior to application of 98G Mini Pelletized Limestone.
Bulk Density - 72 lbs/CF

Guaranteed Analysis

Calcium (Ca):	36%	Sieve Sizing Before Pelletizing	
Calcium Carbonate (CaCO ₃):	94%	100% passing	4-mesh
Calcium Carbonate Equivalent (CCE):	94%	100% passing	8-mesh
Moisture content does not exceed:	1.0%	100% passing	10-mesh
		100% passing	20-mesh
		98% passing	40-mesh
		97% passing	50-mesh
		95% passing	60-mesh
		90% passing	100-mesh
		70% passing	200-mesh

Derived from limestone.

PENNSYLVANIA, VIRGINIA:
ENV = 90%

OHIO:
1823 Pounds of ENP/Ton

IOWA:
Iowa Secretary of Agriculture Certified 1820 lbs
ECCE per ton.

FLORIDA:
F001993: this material requires 1894 lbs to be
equal to one ton of standard liming material.

NEBRASKA, OKLAHOMA:
ECCE = 91%

KANSAS:
ECC = 91.6%
ECCE = 1832 lbs/ton

MINNESOTA:
ENP = 90%

MISSOURI:
ENM = 740 lbs/ton; Emg = 2 lbs/ton

NORTH CAROLINA:
1880 lbs. of this material equals one ton of
standard liming material. One standard ton of
lime is 90% Calcium Carbonate Equivalent
ENV = 99%


TENNESSEE:
RNV = 93%

MASSACHUSETTS:
ENV = 90%

NEW YORK:
TNV = 94%

WISCONSIN:
Neutralizing Index: 92
Neutralizing Index Zone = 90-99

OREGON:
Lime Score = 92

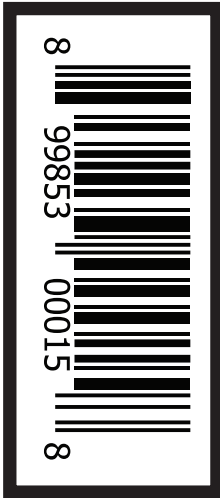

Information regarding the contents and levels of metals in this product is available on the internet at <http://www.aapfco.org/metals.html>

98G Mini Pelletized Limestone is intended to raise the pH of acidic soils.



CALCIUM
PRODUCTS™


ISU Research Park, 2520 North Loop Drive, Suite #7100, Ames, IA 50010
800-255-8196 • info@calciumproducts.com • www.calciumproducts.com
Calcium Products, the Calcium Products logo, 98G and the 98G logo are trademarks
of Calcium Products. © 2017 Calcium Products. All rights reserved.

MINI

PELLETIZED LIMESTONE



MINI
98G™
PELLETIZED LIMESTONE

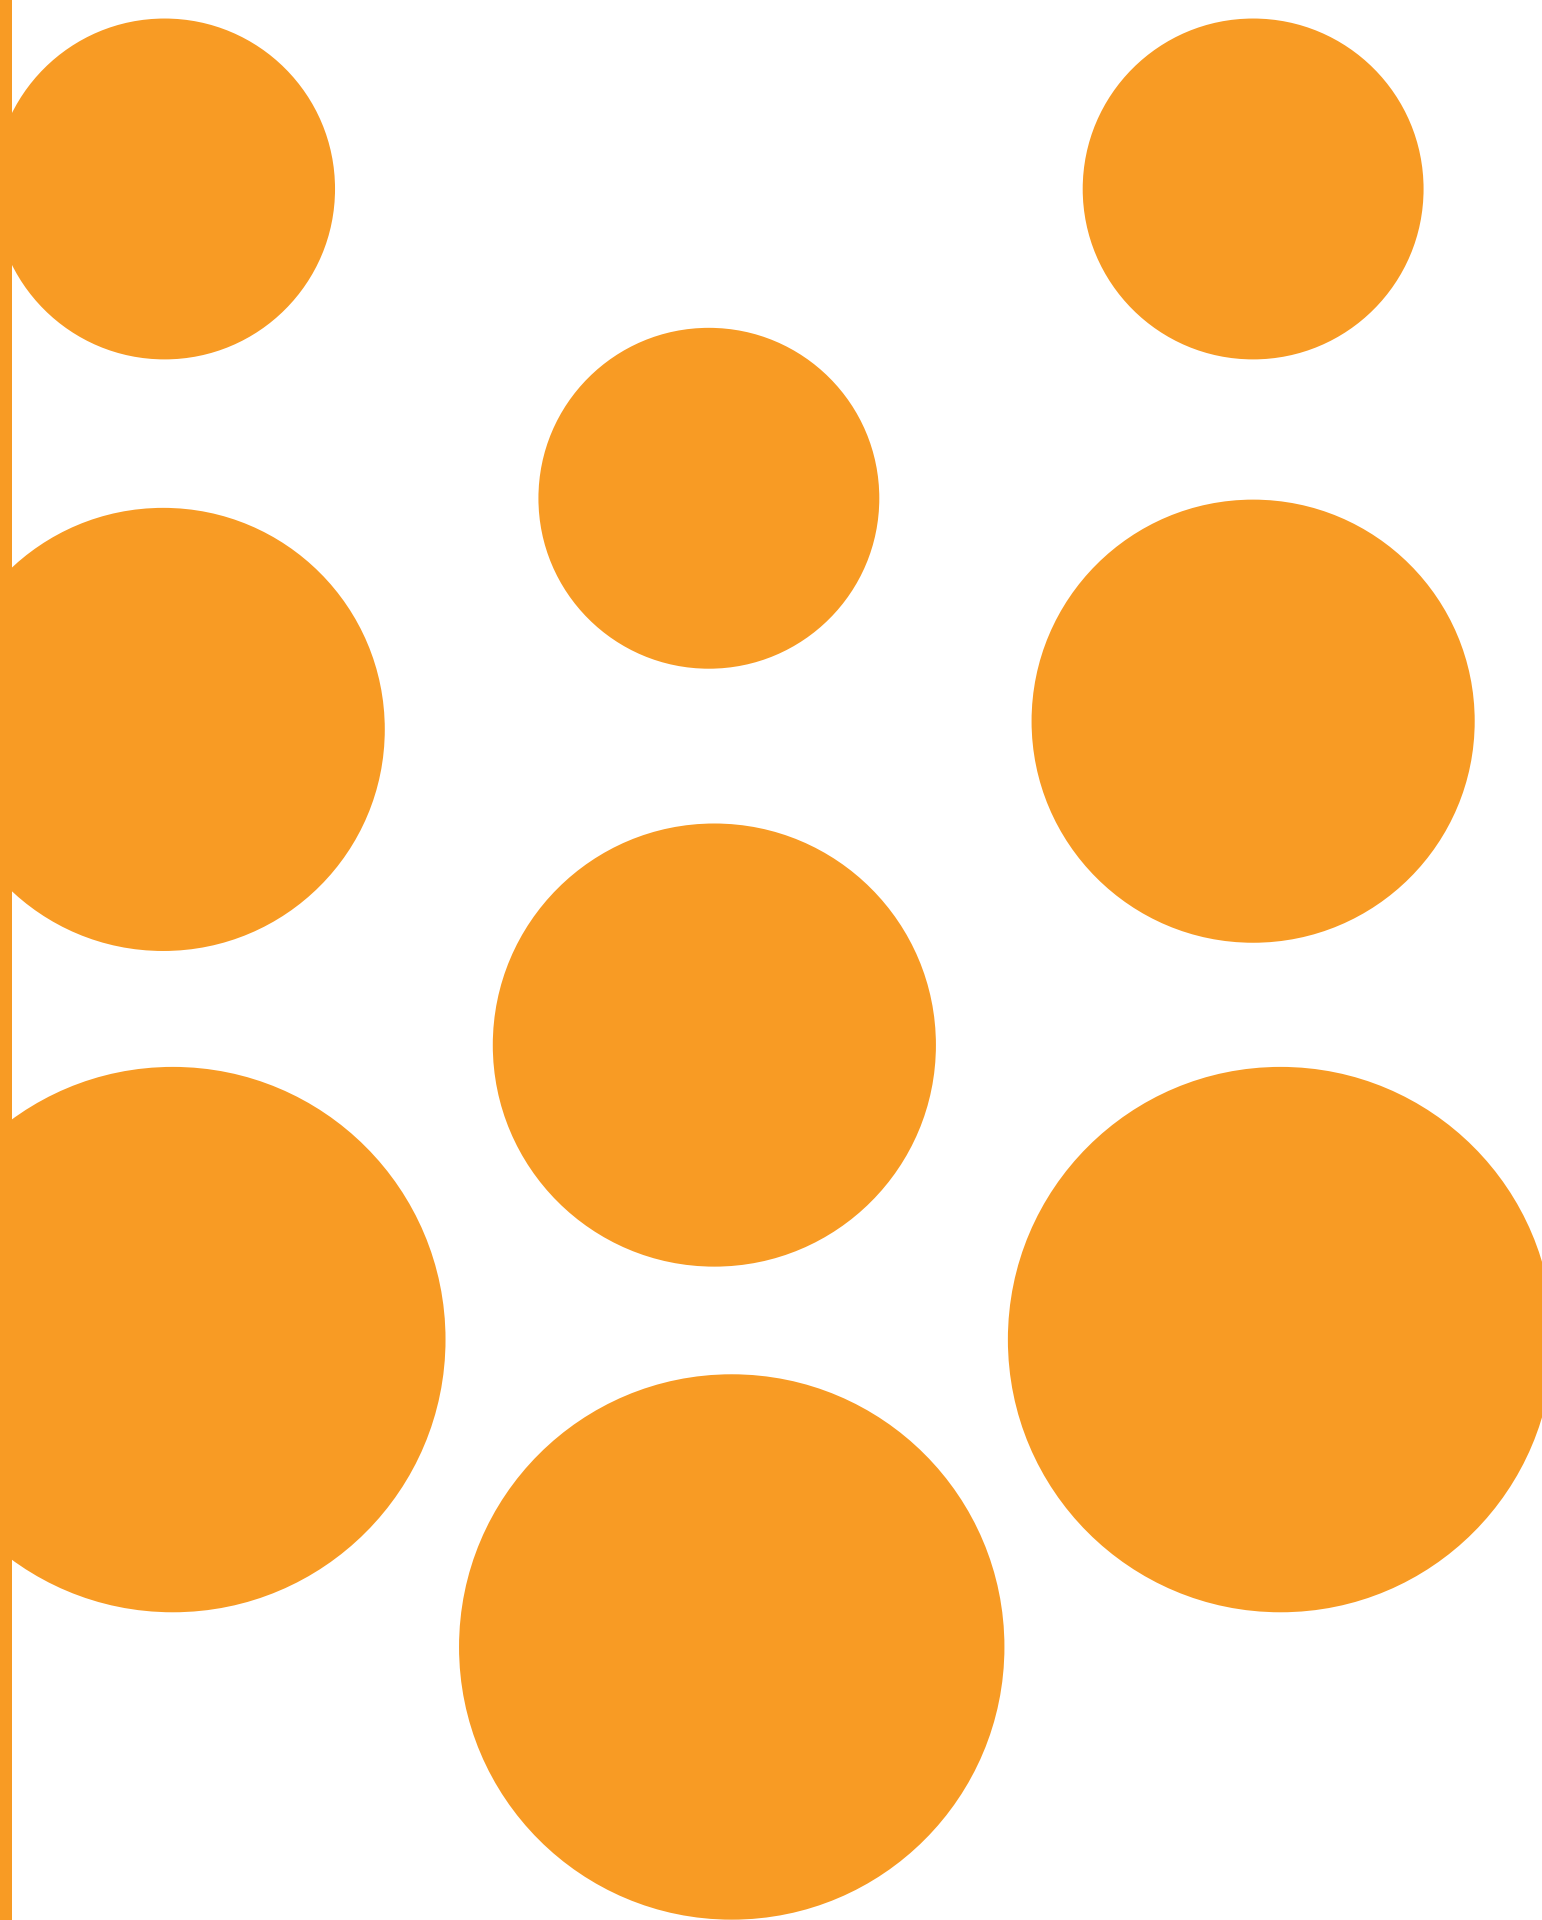

**Manufactured and
Guaranteed by:**
Calcium Products
Gilmore City Location
50602 330th Ave.
Gilmore City, IA 50541

Corporate Address:
Calcium Products
ISU Research Park
2520 N. Loop Dr., #7100
Ames, IA 50010



**CALCIUM
PRODUCTS**™

NET WT. 50 lbs./22.67 kg



MINI
98G™
PELLETIZED LIMESTONE



MINI